




Thermoelectric cooling unit TG 3152-24V



Product Features

Brand Name:	SoliTherm Peltier
Order Number:	3152303
Housing Material:	Stainless steel AISI 304 (V2A)
IP class EN 60529:	IP 66 NEMA 4X
Approvals:	CE, cURus, RoHS

Accessories:		<input checked="" type="checkbox"/> Temperature controller (heating / cooling)
		<input type="checkbox"/> Electronic thermostat (cooling)
		<input type="checkbox"/> Condensate Kit

Taric Code:	84158300
--------------------	----------


Technical data TG 3152-24V

Cooling capacity L35L35:	150 W
Temperature range:	-20°C - +65°C
Air volume flow:	Ambient air circuit: 120 m ³ /h Cabinet air circuit: 60 m ³ /h
Mounting:	Recessed
Dimension HxWxD:	400 x 180 x 171 mm
Weight:	9 kg
Cut out dimensions:	370 x 155 mm
Voltage / Frequency:	24 V DC
Current L35L35:	6.3 A
Starting current:	11 A
Max. current:	7.5 A
Nominal power L35L35:	168 W
Max. power:	180 W
Fuse:	10 A (T)
Connection:	Connection terminal block

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cabinet cooling units - Peltier](#)


Performance Graph:

T = Ambient temperature
P = Cooling capacity

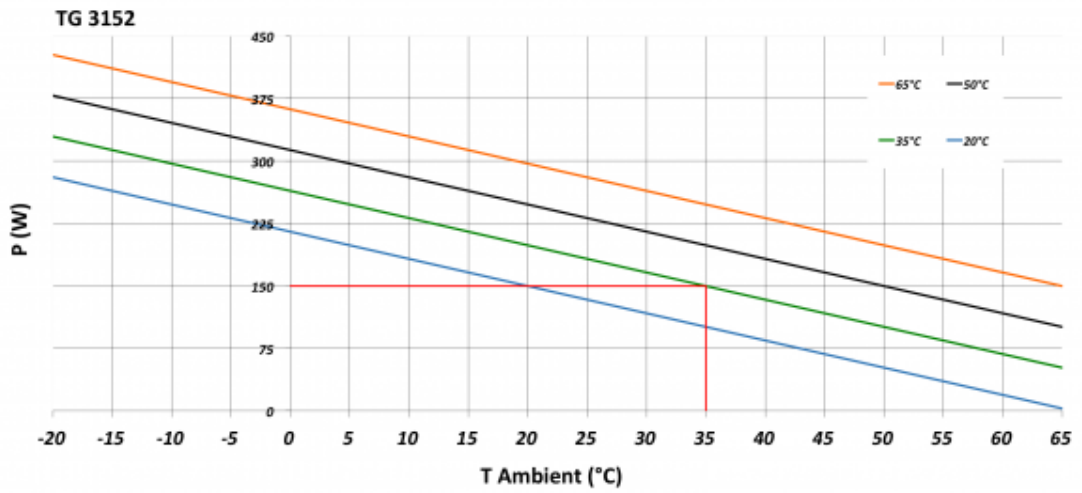


[click image to enlarge](#)

Air flow:

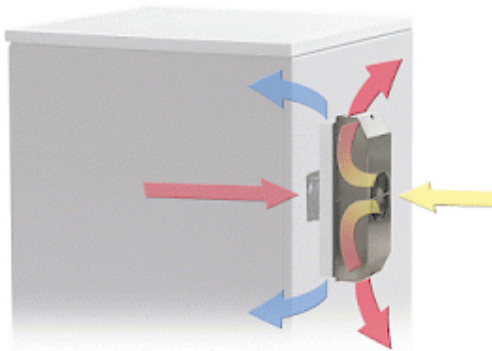

[click image to enlarge](#)

Cut out dimensions:

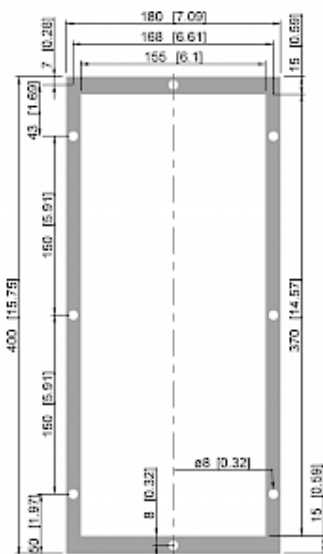

[click image to enlarge](#)